


• Installation Procedures

1. Connection Diagrams

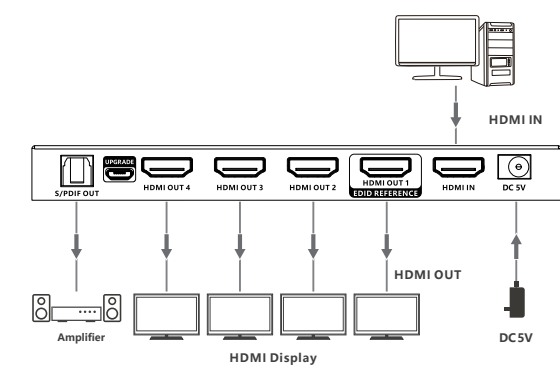

2. Connection Instructions

- 1) Connect the splitter HDMI input interface to the device with HDMI signal source output interface via an HDMI cable.
- 2) Connect the splitter HDMI output interface to the display device with HDMI input interface via an HDMI cable.
- 3) If you need to output the audio of the signal source separately, please connect the speaker or power amplifier with S/PDIF audio cable
- 4) If firmware upgrading is required, please connect the computer with a Micro USB cable.
- 5) Connect the power supply, the power indicator is on, and the product starts to work.

• FAQ

Q: There is no image output from the display device.

- A:
- 1) Please check whether the power supply is connected properly and whether the power indicator is always on.
 - 2) Replace the HDMI cable and reconnect it.
 - 3) Check whether the input source of the display device is set to the relevant input channel.

Q: The TV shows unstable images, flashing screen, flashing snow.

- A:
- 1) Check whether the HDMI cable is firmly connected.
 - 2) Reconnect the input signal source to the TV directly, or reset the signal source.
 - 3) When transmitting 8K@60Hz HDMI signal, you will need an HDMI2.1 cable.

Q: The TV sound stuck or silent.

- A:
- 1) Switch other audio formats.
 - 2) Check whether the HDMI cable is firmly connected.

• Specification

Items		Description
Video signal	HDMI Input	1x HDMI
	HDMI Output	4x HDMI
	Compatibility	HDMI 2.1, HDMI2.0, HDMI1.4
		HDCP 2.3, HDCP2.2, HDCP1.4
	Resolutions	7680x4320@24/25/30/50/60Hz 3840x2160@24/25/30/50/60/120Hz 1080p@24/25/30/50/60/120Hz 720p@50/60/100/120Hz
	EDID passthrough, auto downscaling	
	HDR10/HDR10+/Dolby Vision	
Audio signal	HDMI 3D	
	HDMI CEC	
Power	VRR, Free Sync, G-Sync	
	S/PDIF Output	LPCM5.1, DTS 5.1, Dolby 5.1
	HDMI Output	Dolby Atmos, Dolby Digital 7.1CH, Dolby True HD, DTS:X, DTS-HD, LPCM 7.1CH, etc.
Operating Environment	Power Supply	DC5V/2A
	Power Consumption	< 6W
	Working temperature	-20°C~60°C
Physical Properties	Storage temperature	-30°C~70°C
	Humidity	0~90%RH (No condensation)
	Housing	Iron
Physical Properties	Weight	252g
	Color	Black
	Dimensions	160.0(L)*58.0(W)*16.5(H)mm

Protection	ESD protection 1a Contact discharge level 2 (±4KV) 1b Air discharge level 3 (±8KV) Implementation of the standard: IEC61000-4-2
	Lightning protection, Surge protection

Disclaimer

The product name and brand name may be registered trademark of related manufactures. ™ and ® may be omitted on the user manual. The pictures in this user manual are just for reference. We reserve the rights to make changes without further notice to a product or system described herein to improve reliability, function or design.